

STROJNÍ ZÁVITNÍK SE ŠROUBOVITOU DRÁŽKOU 40°

Machine tap with right-hand spiral flutes 40°

 Maschinengewindebohrer mit 40° RSP, rechtsschneidend


 Машинный метчик со спиральной канавкой 40°

 Maschi a macchina con taglienti elicoidali destri 40°

 40° Helis Makina Kılavuzu

TYPE
UNI

2250CYC

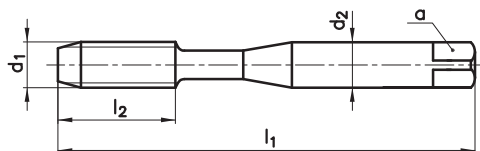

Vg



DIN
7756

HSSE

≈DIN
371



d_1	P	l_1	l_2	d_2	a	z	
Vg 5	0,705	80	10	6	4,9	3	4,7
Vg 6	0,800	80	10	6	4,9	3	5,5
Vg 8	0,794	90	13	8	6,2	3	6,9
Vg 10	0,907	90	13	10	8	3	9,5
Vg 12	0,977	100	14	9	7	3	11,3

Řezné podmínky / Cutting conditions / V_c

P3.1	Cement, a nitr. / Case hardened and nitriding steels	3-5
M5.1	Nerezavějící oceli / Stainless steels 450-800N/mm ²	4-7
M5.2	Nerezavějící oceli / Stainless steels 600-1000N/mm ²	3-5

narex
žďanice