

Core drills and reamers Aufbohrer und Reibahlen




VÝSTRUŽNÍKY STROJNÍ SE ZUBY VE ŠROUBOVICI S VÁLCOVOU STOPKOU
MACHINE REAMERS WITH STRAIGHT SHANK, SPIRAL-FLUTED
MASCHINEN-REIBAHLEN MIT ZYLINDRISCHEM SCHAFT, DRALLGENUTET

ČSN 221430

DIN 212

HSS	BLANC	FORM B 2,0 ÷ 5,5	FORM D 6,0 ÷ 16,0				V 2,0 ÷ 5,5	F 6,0 ÷ 16,0		
Steel <1000 MPa	Stainless steel <850 MPa	Cast iron	Al/alloy	Cu/alloy	Plastics	Ti/alloy <850 MPa				

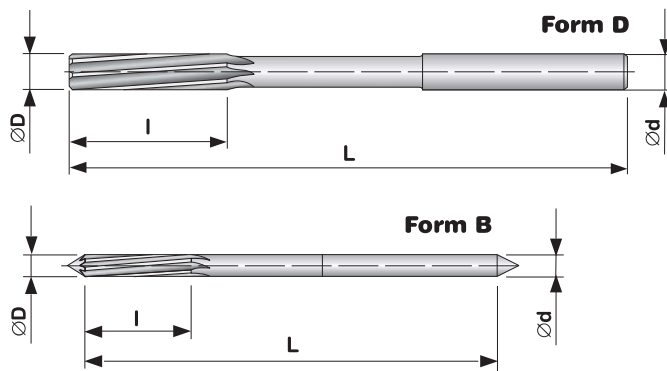

ØD mm	L mm	I mm	Ød h9 mm			Code 221430
2	49	11	2,0	4	0,001	2 .. 49/11
2,2	53	12	2,2	4	0,001	2,2 .. 53/12
2,5	57	14	2,5	4	0,002	2,5 .. 57/14
2,8	61	15	2,8	6	0,003	2,8 .. 61/15
3	61	15	3,0	6	0,003	3 .. 61/15
3,2	65	16	3,2	6	0,004	3,2 .. 65/16
3,5	70	18	3,5	6	0,005	3,5 .. 70/18
4	75	19	4,0	6	0,006	4 .. 75/19
4,5	80	21	4,5	6	0,009	4,5 .. 80/21
5	86	23	5,0	6	0,011	5 .. 86/23
5,5	93	26	5,5	6	0,016	5,5 .. 93/26
6	93	26	6,0	6	0,020	6 .. 93/26
7	109	31	7,0	6	0,028	7 .. 109/31
8	117	33	8,0	6	0,035	8 .. 117/33
9	125	36	9,0	6	0,050	9 .. 125/36
10	133	38	10,0	6	0,064	10 .. 133/38
11	142	41	10,0	6	0,085	11 .. 142/41
12	151	44	10,0	8	0,100	12 .. 151/44
13	151	44	10,0	8	0,120	13 .. 151/44
14	160	47	12,5	8	0,160	14 .. 160/47
15	162	50	12,5	8	0,168	15 .. 162/50
16	170	52	12,5	8	0,180	16 .. 170/52

Poznámka / Note / Notiz: ostatní neuvedené rozměry a licování na požádání / other dimensions and fits - on request / nicht angegebene Abmessungen und Passung nur auf Anfrage
 .. = licování výstružníku (7 = H7; 8 = H8; 1 = H11) / .. = tolerances of reamer (7 = H7; 8 = H8; 1 = H11) /
 .. = Reibahlenpassung (7 = H7; 8 = H8; 1 = H11)

